


Tape wrap PTFE convoluted hose

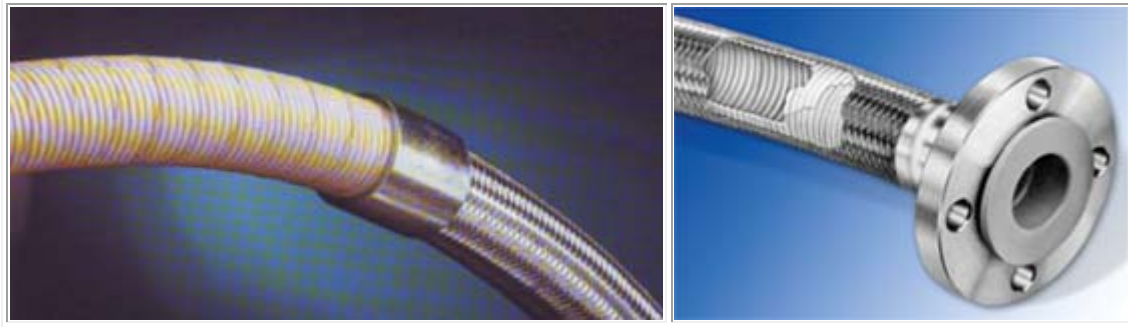

Inner core of virgin corrugated PTFE with PTFE impregnated fibre glass tape and a high tensile stainless steel 304 wire braid. Each corrugation has a low profile to promote easy cleaning.

Application: This hose is highly suitable for thermal cycling in laundries, rubber and plastic moulding and various types of steam service. However, they are not recommended for steam - cold water cycling applications. Temperature range - 55° C to 220° C

TAPE WRAP PTFE CONVOLUTED HOSE WITH SS BRAID					
Code	ID MM	OD MM	Working Pressure BAR	BURST Pressure BAR	Minimum Bend Radius MM
TX012	13	18.5	102	410	75
TX016	16	23	90	360	85
TX020	20	27	85	340	95
TX025	25	32	85	340	130
TX032	32	40	68	270	155
TX038	38	46	51	205	190
TX050	50	58	34	138	255
TX076	76	88	17	68	380

For Quality and Dependability, Contact:

ABC SYNTHETICS PRIVATE LIMITED

Office : 323 ARUN CHAMBERS, TARDEO ROAD, BOMBAY 400 034

PHONE : +91-22-2352-2380 / 2352-0696 / 2351-5675 / 6660-2159 FAX : +91-22-2351-3106

E-Mail: abcplin@gmail.com Web : www.abcspl.com