

### SILICONE HOSE WITH SPIRAL WIRE

#### APPLICATION:


Suitable for the pharmaceutical, food and cosmetics industries. Construction offers a good balance between strength and light weight, making this ABCOFLEX hose easy to handle and also suitable at shorter lengths. It can be used both as a pressure and suction hose or as a vibration damper.

#### CONSTRUCTION:

Smooth silicone inner and outer lining. Polyester reinforcement, close-lapped stainless steel spiral. The hose meets USP class VI, FDA CFR 177.2600, BFR part XV Standards.

#### TEMPERATURE RANGE:

-60°C - +200°C.

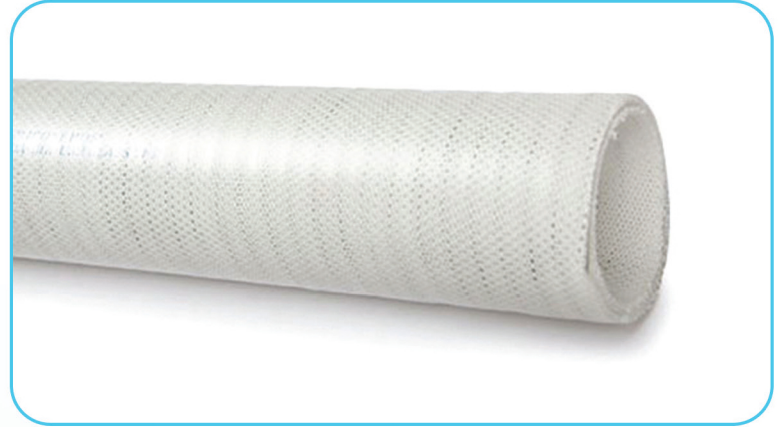

Code	ID	OD	Working Pressure	Burst Pressure	Minimum Bend Radius	Vacuum
	MM	MM	BAR	BAR	MM	MM of Hg
PSV10	08	16	10.5	42	35	760
PSV12	13	23	10.5	42	50	760
PSV16	16	25	10.5	42	65	760
PSV20	20	29	10.5	42	65	760
PSV25	25	36	10.5	42	90	760
PSV38	38	48	10.5	42	100	760
PSV50	50	61	8.5	35	150	760
PSV65	63	74	8.5	35	280	760
PSV76	76	86	4	28	350	700
PSV100	101	117	3	12	400	600

#### AVAILABLE IN:

- FOOD GRADE
- VACCUM